



Q510-0xxx (2 Channel)
Q510-4xxx (4 Channel)

ACTIONI/Q® Q510

Loop Powered Multi-Channel RTD Input Isolating, 2-Wire Transmitter

Provides 2 or 4 Current Loop Outputs
in Proportion to the PT100 Ohm RTD Inputs



- Up to 4 Two-Wire Transmitters in a Single Package
- Output Linear to Input Temperature
- Standard Input Ranges

- High Density DIN Rail Mounting
- SnapLoc™ Plug-in Terminals
- Output Loop Powered from 10 to 35VDC

Description

The Q510 is a DIN rail mount, RTD Input, dual or quad channel two-wire transmitter. Each channel accepts an RTD input and provides an output loop powered 4-20mA signal, linear to the temperature input. Each channel is an independent transmitter with 600VDC channel to channel isolation.

All ActionI/Q modules feature SnapLoc plug-in screw terminals for easy installation and low Mean-Time-To-Repair (MTTR). Two or more modules can slide together and interlock for solid, high density mounting (remove either the foot, or the adjacent unit's faceplate for right-hand side or left-hand side mounting, respectively). The module to be attached will easily slide on to the side of the mounted unit.

Application

RTD input, two-wire transmitters are used to convert a specific temperature range into a regulated 4-20mA signal. Two-wire transmitters are primarily used in remote locations near the sensor since they reduce the probability of signal errors and save wiring costs by utilizing the two power wires to send the 4-20mA signal. The current signal is usually sensed by a control system or displayed for an operator.

Typically, several RTDs are used to measure temperatures in a vessel or cell. The lead wires can run a short distance to a panel, or farther with the use of shielded wire, without errors caused by noise or lead resistance in the wires. These sensor wires are then terminated at the two-wire transmitter and converted into a 4-20mA signal which is highly immune to noise and not affected by lead resistance, both of which can cause significant errors in voltage signals transmitted over long distances.

Operation

The Q510 operates as a two-wire transmitter; each channel derives its power from a (10-35VDC) source connected in series with the 4-20mA output loop. Typically a 24VDC source is used, allowing 14VDC (700 ohms @ 20mA) for other devices connected in series in the current loop. The outputs of the Q510 are protected from reverse polarity. Zero and span pots are provided for each channel to calibrate the output to the input RTD. Standard input temperature ranges (see Table) are calibrated to the rated accuracy. One range per module; two or four channels per module.

Calibration

1. Connect the input to a calibrated three-wire resistance source (not a resistance simulator). Connect the output in series to a voltage source capable of supplying at least 20mA and a milliamp current meter.

2. Set the calibrator to the specified minimum temperature resistance value and adjust the zero potentiometer for 4mA output.

Note: The voltage source (Vs) connected to the output must be sufficient to accommodate all other device loads (RL) in the current loop:

$$V_s \geq 10V + 0.02 \times R_L$$

3. Set the calibrator to the specified maximum temperature resistance value and adjust the span potentiometer for 20mA output.

4. Repeat steps 2 and 3, as necessary.

| Q510 Ranges | | | |
|------------------|------------------|--------------|---------|
| 2 Channel Models | 4 Channel Models | Inputs | Outputs |
| Q510-0B01 | Q510-4B01 | 0 to 100° C | 4-20mA |
| Q510-0B02 | Q510-4B02 | 0 to 150° C | 4-20mA |
| Q510-0B03 | Q510-4B03 | 0 to 200° C | 4-20mA |
| Q510-0B04 | Q510-4B04 | 0 to 250° C | 4-20mA |
| Q510-0B05 | Q510-4B05 | 0 to 500° C | 4-20mA |
| Q510-0B06 | Q510-4B06 | 0 to 200° F | 4-20mA |
| Q510-0B07 | Q510-4B07 | 0 to 300° F | 4-20mA |
| Q510-0B08 | Q510-4B08 | 0 to 400° F | 4-20mA |
| Q510-0B09 | Q510-4B09 | 0 to 500° F | 4-20mA |
| Q510-0B10 | Q510-4B10 | 0 to 1000° F | 4-20mA |

Specifications

Input:

Accepts two or four, 3-wire Pt100 RTDs (alpha = 0.00385Ohms/Ohm/°C)
Ranges: see Table

Input Excitation:

0.8mA, typical, each channel

Input Leadwire Effect:

<1% of full scale output, max. @40Ohms max./ lead

Output Range:

4-20mA

Supply Voltage Range:

10 to 35VDC, each channel

Output Accuracy:

≤ 0.1% of full-scale input typical, ≤0.4% max., including linearity, repeatability and hysteresis

Adjustability:

Front accessed 10 turn pot., ±2% of span for zero and span, typical

Stability:

≤ 0.025%/°C of full-scale maximum for full-scale and zero

ESD Susceptibility:

Meets IEC 801-2 level 2 (4kV)

Response Time:

50mSec typical (10 to 90%)

Q510 (2 Channel) Terminals

| Terminal | Connection | Terminal | Connection |
|----------|------------------------------|----------|----------------------------|
| A1 | Channel 1 Power & Output (+) | C1 | Channel 2 RTD Input Return |
| A2 | Channel 1 Power & Output (-) | C2 | Channel 2 RTD Input (-) |
| A3 | Not Connected | C3 | Channel 2 RTD Input (+) |
| A4 | Channel 2 Power & Output (+) | C4 | Channel 1 RTD Input Return |
| A5 | Channel 2 Power & Output (-) | C5 | Channel 1 RTD Input (-) |
| A6 | Not Connected | C6 | Channel 1 RTD Input (+) |

Ordering Information

Models & Accessories

Specify:

1. Model: **Q510** (see Table)
2. Channels: 2 or 4
3. Input Range: (see Table)
4. Accessories: (see Accessories)

Accessories

Action/Q modules mount on standard TS32 (model MD02) or TS35 (model MD03) DIN rail. In addition the following accessories are available:

| | |
|--------------|----------------------------|
| MD02 | TS32 DIN rail |
| MD03 | TS35 x 7.5 DIN rail |
| WV905 | 24VDC Power Supply (500mA) |
| H910 | 24VDC Power Supply (1 Amp) |
| H915 | 24VDC Power Supply (2.3 A) |

Temperature:

Operating: -40 to 80°C (-40 to 176°F)

Storage: -40 to 80°C (-40 to 176°F)

Humidity (non-condensing):

Operating: 15 to 90% @45°C

Wire Terminals:

Socketed screw terminals for 12-22 AWG

Weight:

0.34lbs

Agency Approvals:


CSA certified per standard C22.2 (File No. LR42272).

UL recognized per standard UL508 (File No. E99775).

Q510 (4 Channel) Terminals

| Terminal | Connection | Terminal | Connection |
|----------|------------------------------|----------|----------------------------|
| A1 | Channel 1 Power & Output (+) | C1 | Channel 2 RTD Input Return |
| A2 | Channel 1 Power & Output (-) | C2 | Channel 2 RTD Input (-) |
| A3 | Not Connected | C3 | Channel 2 RTD Input (+) |
| A4 | Channel 2 Power & Output (+) | C4 | Channel 1 RTD Input Return |
| A5 | Channel 2 Power & Output (-) | C5 | Channel 1 RTD Input (-) |
| A6 | Not Connected | C6 | Channel 1 RTD Input (+) |
| B1 | Channel 3 Power & Output (+) | D1 | Channel 4 RTD Input Return |
| B2 | Channel 3 Power & Output (-) | D2 | Channel 4 RTD Input (-) |
| B3 | Channel 4 Power & Output (+) | D3 | Channel 4 RTD Input (+) |
| B4 | Channel 4 Power & Output (-) | D4 | Channel 3 RTD Input Return |
| | | D5 | Channel 3 RTD Input (-) |
| | | D6 | Channel 3 RTD Input (+) |

Dimensions

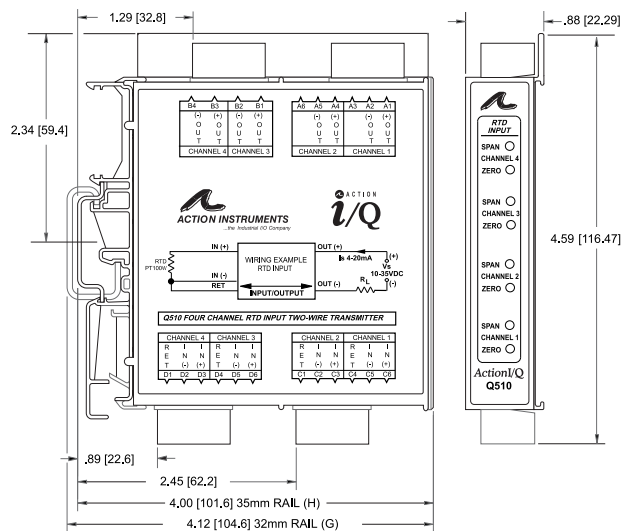

Eurotherm®

by **Schneider Electric**



Printed on recycled paper

Schneider Electric Systems USA, Inc.

44621 Guilford Drive, Suite 100

Ashburn, VA 20147

+1-703-724-7300

info.eurotherm.us@schneider-electric.com

www.eurotherm.com

Factory Assistance

For additional information on calibration, operation and installation contact our Technical Services Group:

+1-703-724-7300

US.Support@schneider-electric.com

721-0562-00-M 09/06 Copyright© Eurotherm, Inc 2006