

# T820

MODEL



## Mono Graphic Operator/Control Panel Specification Sheet

- 128 x 64 pixel Mono Graphic Display
- LED Backlight
- 25 Function Keys
- 4 Programmable Keys
- Password Protection
- Multi-setpoint programmer
- Data recording
- Recipes
- Alarm History
- 10/100Mbps Ethernet
- Modbus Master/Slave
- Small panel size

The T820 provides an ideal operator interface for setting and displaying data. It can also control, monitor and record a wide range of PLC's, data acquisition and I/O control systems such as the T2550 and 2500 Programmable Automation Controllers.

Although compact, the T820 is constructed from a substantial zinc diecast and sheet case with a sealed membrane keypad through which the display is viewed. Easily sealed to the panel to IP66 the unit provides a secure panel mounted interface or remote mounted equipment.

Dynamic text, help messages and easy to use function keys provide the operator with rapid access to the acquired variable data. The function keys can be programmed for direct access to displays, alarms and recipe download or simply toggle a variable. The programming software LINtools is simple to use and can run on most Windows operating systems.


### Multi-setpoint program

Many applications need to vary the process value over time. Temperature control is one such application where it is very common to 'ramp' the process value (channel) from one level to another over a set time period using a setpoint program.

The T820 provides support for Multiple Setpoint programs that can be run simultaneously. Each program is capable of profiling up to eight channels, with up to 32 segments per profiled channel. In addition to controlling the setpoint during each segment of the profile, the controllers can also be used to activate up to 128 Digital Events during a segment.


### T820 Terminal unit – Serial connection

The Terminal version of the T820 is supplied without a processor and is connected directly to the serial port of the T2550 Programmable Automation Controller using proprietary communications protocol. All configuration parameters for the T820 terminal unit are stored on the T2550 PAC. The T820 is supported by both Simplex and Duplex base options.

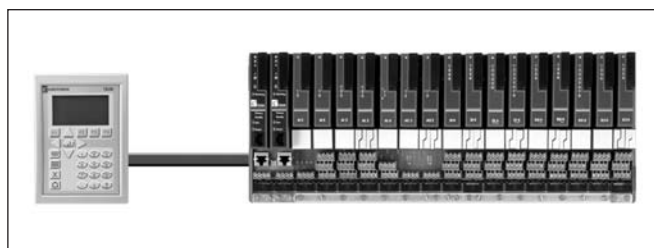


## T820 Control Unit – ELIN Network

The control version of the T820 is fitted with an integral processor, providing additional features such as the ability to run a local LIN database, connect to an ELIN network, as shown below. As standard the T820 is a Modbus (serial or TCP) slave

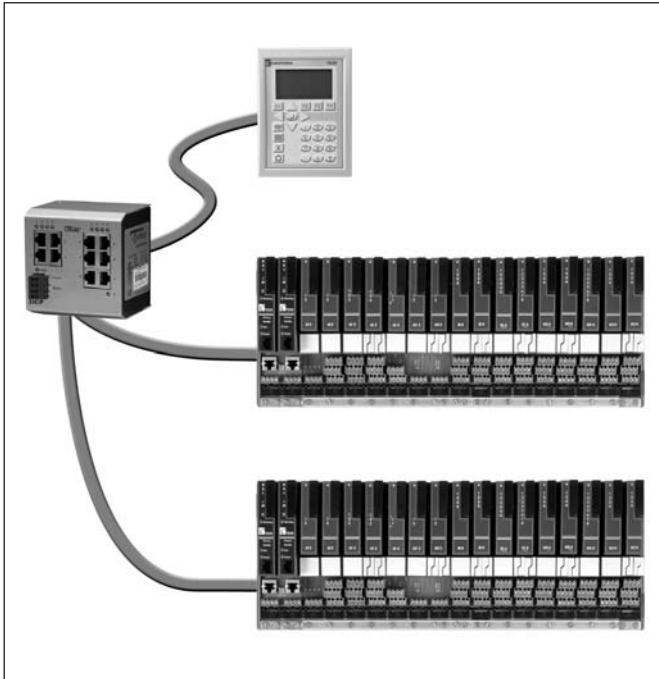

## T820 Control Unit – Modbus Master

The T820 Control panel can also be used as a simple HMI to any device that supports Modbus (TCP or Serial) including third party devices by the addition of the Modbus Master option.

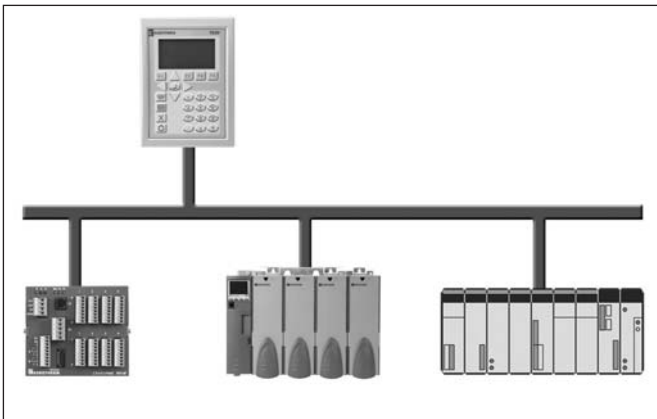

## Modbus Gateway Facility

The Modbus Gateway facility provides a Modbus interface to the LIN Database. By using the techniques of LIN function block caching, the Modbus Gateway facility can access data in other nodes distributed on the LIN, as well as LIN function blocks in the local LIN database.

## Recording and Archiving (Control unit only)

The T820 Control Panels have internal non-volatile flash memory for secure tamper resistant data storage, providing for local Data Logging. In addition all T820 Control Panels support Ethernet connectivity. As such, Data stored within the internal flash memory can be configured to periodically archive to primary, secondary and tertiary FTP Servers. Archiving files to FTP servers effectively provides a secure, infinite archiving capacity.

### Data Recording

Data Recording is the terminology used to describe the storage of PV's, message and alarm information in the internal Flash memory of the product in order to generate historical data in the form of a set secure tamper resistant history files.

The following example provides estimated memory duration based on logging 16 Parameters to a single group.

Recording Interval (Update A)	Estimated Duration	
	Min/Max Off	Min/Max On
1s	60 hrs	31 hrs
5s	12 days	6 days
10s	25 days	13 days
20s	50 days	26 days
60s	150 days	77 days

### Data Archiving


Data Archiving is the terminology used to describe the copying of selected parts of the history i.e. one or more history files (.uhh) to Primary, Secondary or Tertiary FTP Servers.

### FTP Push

For efficiency historical data files are automatically deleted on a first in first out (FIFO) basis from the internal flash memory of the T820 (7Mb for history). In order to ensure longevity of data the T820 is able to push historical data files (.uhh) to Primary, Secondary or Tertiary FTP servers at user defined intervals. Thus, depending on the archive strategy chosen, data is never lost. As an alternative Eurotherm Review can be used to pull data directly from the T820.

### Review

Review Software provides additional functionality and flexibility for the user. Data can be viewed in spreadsheet format or a whole chart copied to the clipboard for direct pasting into another document. A complete batch chart can be automatically printed to a specified printer without the need for operator intervention.

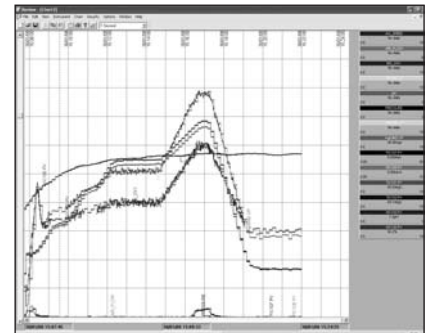

### Report

Report is an add-in for Excel that will directly access encrypted files in the Review Database. This package gives the user total flexibility to automatically create reports in formats to suit every department – removing human error and saving time. Report templates can be created to suit every need without affecting the secure, primary archive data.



## General Specification

### Display

Type:	Mono Graphic FSTN LCD
Back lighting:	LED, reflective
Resolution:	128 x 64 pixels
Rows x characters:	6 x 21
Text characters (pixel):	8 x 6 or 16 x 12
Font sets:	ASCII
Graphical objects:	Bargraph, dynamic bitmaps, circle, triangle, rectangle, line
Contrast Adjustment:	Configurable

### User Interface

Operator keys:	25
Function keys:	4
Alphanumeric keys:	12

### Main Features

Language support:	English, French, German, Italian, Spanish and Portuguese
Additional languages:	Via Dictionary file
Passwords:	Standard: 4
Additional:	User Configurable
Max no. of pages:	99
Variables per page:	Unlimited
Variable formats:	Integer, Floating point, Binary, BCD, ASCII Text
Alarm list:	250 Alarms
Real time clock:	Battery backed

### Continuous Database Resources

Number of function blocks:	255 max
Number of templates:	50 max
Number of libraries:	28 max
Number of EDBs:	32 max
Number of FEATTs:	255 max
Number of TEATTs:	128 max
Number of servers:	6 max
Number of connections:	255
Control database size:	102KB max

### Sequence Control Resources

Sequence memory:	
Program data:	59KB
SFC resources:	53KB
Independent sequence tasks:	68 simultaneously active
Steps:	212
Action associations:	848
Actions:	424
Transitions:	318

## Setpoint Programmer (V5.0 or higher)

### Resources

Max. no. of Programs	Limited by available database memory	
Max. no. of Profiled Channels per Program	8	
Max. no. of Digital events per Program	128	
Max. no. of User values per Program	32	
Max. no. of Segments per Program	32	

No. of Programs	No. of Channels /per prog (max)	No. of Digital Events /per prog (max)	No. User/per prog (max)
1 Program	8	128	32
2 Programs	4	64	16
4 Programs	2	32	8
8 Programs	1	16	4

### Power Requirement

Main supply:	Voltage range: 18-28.8V dc
	Supply ripple: 2Vp-p max
	Consumption: 3.5W max
	Surge current: 200mA max

### Communications

Ethernet port:	10/100Mbps Auto Sensing
Protocols:	LIN peer to peer Modbus TCP Master/Slave
Serial port (Auxiliary):	RS485 (to IOC) or Modbus RTU
Isolation:	50V dc

### Battery Backup

Type:	Poly-carbonmonofluoride/lithium (BR2032)
Support time:	1 year min with unit unpowered
Replacement period:	3 years
Stored data:	Realtime clock and hot start parameters

### Physical


External:	104mm (W) x 144mm (H)
Panel cut out:	98mm (W) x 138mm (H) (+1mm)
Case material:	Zinc diecast and sheet metal
Weight:	1kg max
Safety earth connection:	M4 earth stud on rear cover

### Environmental


Temperature	Storage: -10 - +85°C
	Operating: 0-50°C
Humidity:	Storage: 5-95%RH (non-condensing)
	Operating: 5-85%RH (non-condensing)
RFI	EMC emissions: BS EN68136
	Susceptibility: BS EN68136
Safety specification:	BS EN61010-1:2001
	Installation category II, Pollution degree 2
Shock:	BS EN60068-2-31; BS EN60873, section 2.1.3
Protection	Front panel: IP66
	Rear of panel: IP20

## User Definable Function Keys


A unique feature of the T820 series is the user definable keys which can be configured as required using User Screen Editor Software package. As standard the T820 has four user definable keys that can be configured to perform specific actions such as navigating between process screens.

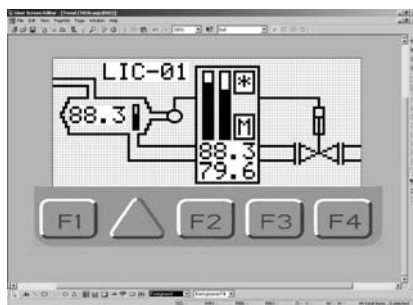

## Wiring Details

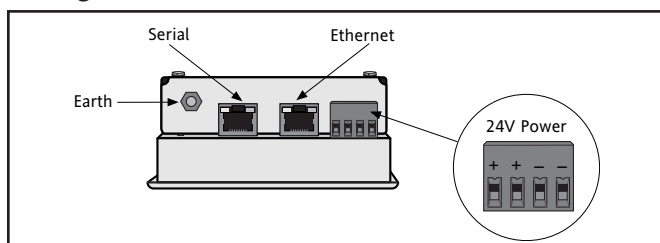

## Mechanical Details

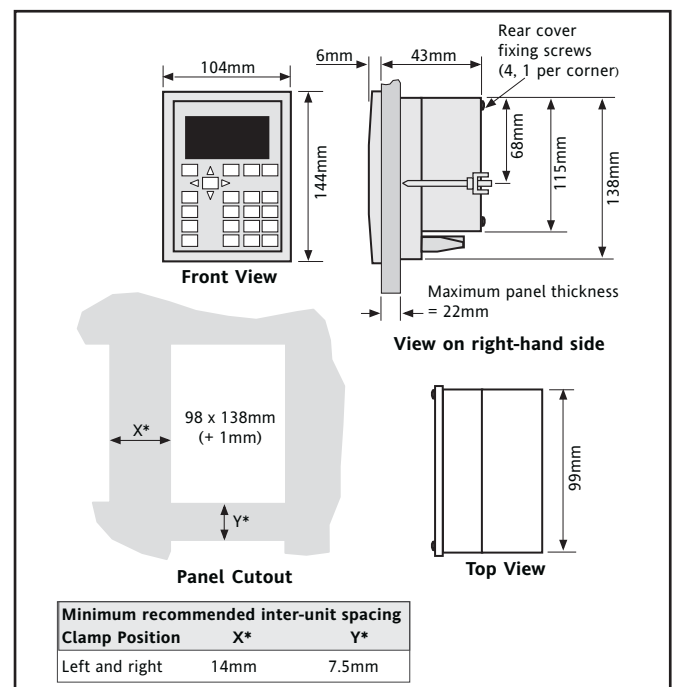

## Ordering code

T820	1	2	3	4	5	6	7	8	9	10	11	12	13
						-		SL					

14
ENG

### Basic Product

T820 Operator terminal

### 1 Processor

**TERMINAL** No Processor, Conn to T2550  
**CONTROL** IOC fitted  
**UPGRADE** IOC supplied separately

### 2 IOC and Software L = Standard License D = Data Logging

	Foundation	Standard	Control	Advanced
L10/D10	Unbounded	0	0	off
L20/D20	Unbounded	50	4	off
L30/D30	Unbounded	100	8	off
L40/D40	Unbounded	Unbounded	4	off
L50/D50	Unbounded	Unbounded	16	off
L60/D60	Unbounded	Unbounded	24	off
L70/D70	Unbounded	Unbounded	32	off
L80/D80	Unbounded	Unbounded	Unbounded	off
L90/D90	Unbounded	Unbounded	Unbounded	on

### 3 Blank Field

- Not used

### 4 Modbus Master Communications

**SLAVE** Modbus-TCP & Serial-Slave communication  
**MASTER** Modbus-TCP & Serial-Master communication

### 5 Battery

**NBAT** Battery not fitted  
**BATT** Battery fitted

### 6 Blank Field

- Not used

### 7 Keyboard

**EUR** Eurotherm  
**OEM** OEM

### 8 Case Colour

SL Silver

### 9 Mounting

**STD** Std through panel  
**DIN** Std through panel  
 +DIN mounting kit

### 10 Applications

**NONE** None  
**XXXXXX** Preconfigured  
 (enter ref. no.)

### 11 Manuals

**NOMAN** No manuals  
**CDM** CD with manuals  
**MAN** Paper manuals

### 12 Technical Support Charge

**TS1** 1 Hour (default)  
**TS2** 2 Hour  
**TS4** 4 Hours  
**TS8** 8 Hours

### 13 Warranty

**XXXXXX** Standard  
**WL005** 5 Year extended

### 14 Installation Guide Manual

ENG English

# Eurotherm: International sales and service

Understanding and providing local support is a key part of Eurotherm business. Complementing worldwide Eurotherm offices are a whole range of partners and a comprehensive technical support team, to ensure you get a service you will want to go back to.

**AUSTRALIA Sydney**  
 Eurotherm Pty. Ltd.  
 T (+61 2) 9838 0099  
 F (+61 2) 9838 9288  
 E [info.au@eurotherm.com](mailto:info.au@eurotherm.com)

**AUSTRIA Vienna**  
 Eurotherm GmbH  
 T (+43 1) 7987601  
 F (+43 1) 7987605  
 E [info.at@eurotherm.com](mailto:info.at@eurotherm.com)

**BELGIUM & LUXEMBOURG Moha**  
 Eurotherm S.A./N.V.  
 T (+32) 85 274080  
 F (+32) 85 274081  
 E [info.be@eurotherm.com](mailto:info.be@eurotherm.com)

**BRAZIL Campinas-SP**  
 Eurotherm Ltda.  
 T (+5519) 3707 5333  
 F (+5519) 3707 5345  
 E [info.br@eurotherm.com](mailto:info.br@eurotherm.com)

**CHINA**  
 Eurotherm China  
 T (+86 21) 61451188  
 F (+86 21) 61452602  
 E [info.cn@eurotherm.com](mailto:info.cn@eurotherm.com)

**Beijing Office**  
 T (+86 10) 63108914  
 F (+86 10) 63107291  
 E [info.cn@eurotherm.com](mailto:info.cn@eurotherm.com)  
**Guangzhou Office**  
 T (+86 20) 38106506  
 F (+86 20) 38106511  
 E [info.cn@eurotherm.com](mailto:info.cn@eurotherm.com)

**DENMARK Copenhagen**  
 Eurotherm Danmark AS  
 T (+45 70) 234670  
 F (+45 70) 234660  
 E [info.dk@eurotherm.com](mailto:info.dk@eurotherm.com)

**FINLAND Abo**  
 Eurotherm Finland  
 T (+358) 22506030  
 F (+358) 22503201  
 E [info.fi@eurotherm.com](mailto:info.fi@eurotherm.com)

**FRANCE Lyon**  
 Eurotherm Automation SA  
 T (+33 478) 664500  
 F (+33 478) 352490  
 E [info.fr@eurotherm.com](mailto:info.fr@eurotherm.com)

**GERMANY Limburg**  
 Eurotherm Deutschland GmbH  
 T (+49 6431) 2980  
 F (+49 6431) 298119  
 E [info.de@eurotherm.com](mailto:info.de@eurotherm.com)

**HONG KONG**  
 Eurotherm Hongkong  
 T (+85 2) 28733826  
 F (+85 2) 28700148  
 E [info.hk@eurotherm.com](mailto:info.hk@eurotherm.com)

**INDIA Chennai**  
 Eurotherm India Limited  
 T (+91 44) 24961129  
 F (+91 44) 24961831  
 E [info.in@eurotherm.com](mailto:info.in@eurotherm.com)

**IRELAND Dublin**  
 Eurotherm Ireland Limited  
 T (+353 1) 4691800  
 F (+353 1) 4691300  
 E [info.ie@eurotherm.com](mailto:info.ie@eurotherm.com)

**ITALY Como**  
 Eurotherm S.r.l  
 T (+39 031) 975111  
 F (+39 031) 977512  
 E [info.it@eurotherm.com](mailto:info.it@eurotherm.com)

**KOREA Seoul**  
 Eurotherm Korea Limited  
 T (+82 31) 2738507  
 F (+82 31) 2738508  
 E [info.kr@eurotherm.com](mailto:info.kr@eurotherm.com)

**NETHERLANDS Alphen a/d Rijn**  
 Eurotherm B.V.  
 T (+31 172) 411752  
 F (+31 172) 417260  
 E [info.nl@eurotherm.com](mailto:info.nl@eurotherm.com)

**NORWAY Oslo**  
 Eurotherm A/S  
 T (+47 67) 592170  
 F (+47 67) 118301  
 E [info.no@eurotherm.com](mailto:info.no@eurotherm.com)

**POLAND Katowice**  
 Invensys Eurotherm Sp z o.o.  
 T (+48 32) 2185100  
 F (+48 32) 2177171  
 E [info.pl@eurotherm.com](mailto:info.pl@eurotherm.com)

**SPAIN Madrid**  
 Eurotherm España SA  
 T (+34 91) 6616001  
 F (+34 91) 6619093  
 E [info.es@eurotherm.com](mailto:info.es@eurotherm.com)

**SWEDEN Malmo**  
 Eurotherm AB  
 T (+46 40) 384500  
 F (+46 40) 384545  
 E [info.se@eurotherm.com](mailto:info.se@eurotherm.com)

**SWITZERLAND Wollerau**  
 Eurotherm Produkte (Schweiz) AG  
 T (+41 44) 7871040  
 F (+41 44) 7871044  
 E [info.ch@eurotherm.com](mailto:info.ch@eurotherm.com)

**UNITED KINGDOM Worthing**  
 Eurotherm Limited  
 T (+44 1903) 268500  
 F (+44 1903) 265982  
 E [info.uk@eurotherm.com](mailto:info.uk@eurotherm.com)  
[www.eurotherm.co.uk](http://www.eurotherm.co.uk)

**U.S.A. Leesburg VA**  
 Eurotherm Inc.  
 T (+1 703) 443 0000  
 F (+1 703) 669 1300  
 E [info.us@eurotherm.com](mailto:info.us@eurotherm.com)  
[www.eurotherm.com](http://www.eurotherm.com)

© Copyright Eurotherm Limited 2008

Invensys, Eurotherm, the Eurotherm logo, Chessell, EurothermSuite, Mini8, Eycan, Eyriss, EPower and Wonderware are trademarks of Invensys plc, its subsidiaries and affiliates. All other brands may be trademarks of their respective owners.

All rights are strictly reserved. No part of this document may be reproduced, modified, or transmitted in any form by any means, nor may it be stored in a retrieval system other than for the purpose to act as an aid in operating the equipment to which the document relates, without the prior written permission of Eurotherm limited.

Eurotherm Limited pursues a policy of continuous development and product improvement. The specifications in this document may therefore be changed without notice. The information in this document is given in good faith, but is intended for guidance only.

Eurotherm Limited will accept no responsibility for any losses arising from errors in this document.

